

WebScan TruCheck™ USB Verification Report

Software Version: 3.03.55, Unit Serial: TC-850-0517-039

Verified: Fri 10-May-2019 03:56:13 PM, Last Calibrated: Fri 10-May-2019 03:48:48 PM

Page 1 of 1


Report Summary

Data	D]>RS>12<GS>CAG 44114<GS>PNO 2458483201B002<GS>SEQ 0000009<RS><EO>
Symbology	DataMatrix
Verified By	John Gorowsky
Company Name	Wendalls
Product Name	DPM part
Job Number	34198

Verification Grades

Standard	Grade	Aperture	Wavelength	Lighting	Formal Grade
ISO29158 (AIM-DPM)	A (4.0)	18	660	45Q	DPM 4.0/18/660/45Q

Image

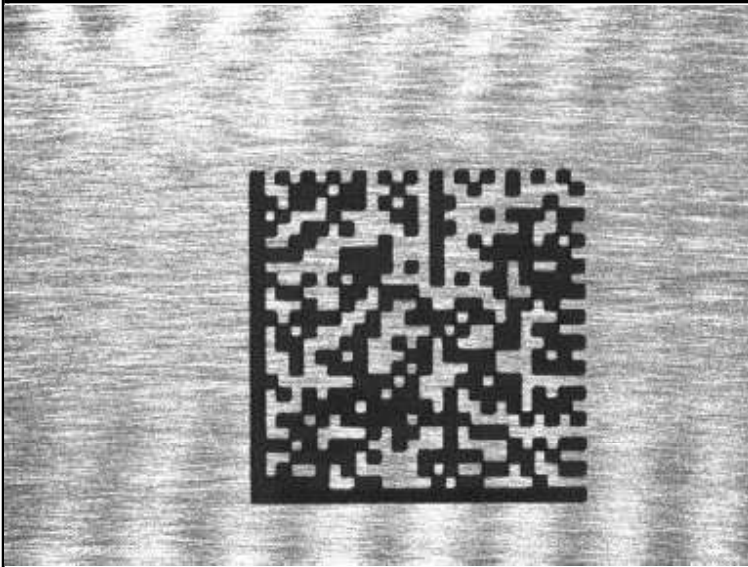

General Characteristics

Matrix Size	26x26 (Data: 24x24)
Horizontal BWG	4%
Vertical BWG	13%
Encoded characters	49
Total Codewords	72
Data Codewords	44
Image	Black on white
Nominal X Dim	22.8 mil
Contrast Uniformity	61 at module(19,4)
Stability	74%

ISO 29158 Quality Parameters

1. Unused Error Correction (UEC)	100%	A		PASS
2. Cell Contrast (CC)	76%	A	Rl/Rd (100/23)	PASS
3a. Cell Modulation (CMOD)		A		PASS
3b. Reflectance Margin (RM)		A		PASS
4. Axial Nonuniformity (ANU)	0%	A		PASS
5. Grid Nonuniformity (GNU)	8%	A		PASS
6. Fixed Pattern Damage (FPD)	4.0	A		PASS
7. Left 'L' Side (LLS)		A		PASS
8. Bottom 'L' Side (BLS)		A		PASS
9. Left Quiet Zone (LQZ)		A		PASS
10. Bottom Quiet Zone (BQZ)		A		PASS
11. Top Quiet Zone (TQZ)		A		PASS
12. Right Quiet Zone (RQZ)		A		PASS
13. Top Transition Ratio (TTR)	0%	A		PASS
14. Right Transition Ratio (RTR)	0%	A		PASS
15. Top Clock Track (TCT)		A		PASS
16. Right Clock Track (RCT)		A		PASS
17. Distributed Damage Grade (DDG)	4.0	A		PASS
18. DECODE		A		PASS
19. Minimum Reflectance (MR)	23%	A		PASS